



- Gradual work
- Burr-free chamfers
- Excellent surface finish
- Minimum vibrations
- Reduction of chip sticking


- 90° milling angle
- Tri-flat shank
- 5% cobalt HSS



Machine



Application

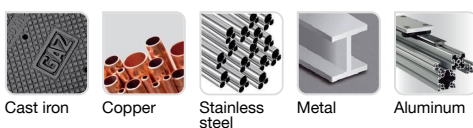

Features



Properties and benefits

- + 90° milling angle : For 90° chamfering operation. ➡ For making 90° chamfering to drown screw and/or rivet heads.
- + Tri-flat shank: cylindrical shank with 3x 120° flats, for 3-piece drill chucks. ➡ Enables maximum torque transmission Prevents the rotation of the bit in the chuck. Specially adapted for through-holes.
- + 5% cobalt high-speed steel: HSS substrate enriched with 5% cobalt. Improved heat retention (strength, cutting sharpness) ➡ For general use in metals up to 1200 N/mm².

Données de gestion :

PCB : 1 / Kilogram. : 0,230 / Dimensions : 0100x0050x0200 mm / EAN : 3221912343932