

# 1050304 | Standard machine tap HSS -M -TivolyNorm -Straight entry -6H -Hexagonal shank

Straight tap for stainless steel, aluminium, adaptable to suit screwdrivers, drills, and bit holders. 6.35 hexagonal shank..




- Especially for steels and aluminiums
- Especially for sheet metals and plastics
- Compact product
- Especially for the Shock Series
- Quick tool changing
- Quick-change shank
- High-speed steel

## Machine



## Application

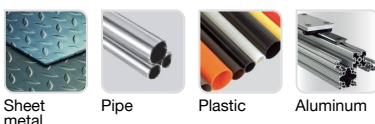

## Features



## Properties and benefits

- + Quick-Change hex attachment: a hexagonal recessed attachment for the quick locking and unlocking of the bit. Compliant with the DIN 3126 E6.3 standard ➡ Enables the quick changing of your bits by doing away with the manual tightening/loosening of the chuck. For drills and screwdrivers.
- + High-speed steel: HSS substrate ➡ For general use in steels and cast irons up to 950 N/mm<sup>2</sup>

## Sets



7 pieces - 6 taps  
HSS M3 to M10  
hexagonal shank -  
Quick change bit  
holder



Code	EAN	Thread	Ø	Pitch	Norm	Drill	L	I	I4	I5	QTY	PCB
1050304030050	3221910881788	M	3	0.5	TivolyNorm	2,50	36	9	3-3.5		1	1
1050304040070	3221910881795	M	4	0.7	TivolyNorm	3,30	39	10	3-3.5		1	1
1050304050080	3221910881801	M	5	0.8	TivolyNorm	4,20	41	15	3-3.5		1	1
1050304060100	3221910881818	M	6	1	TivolyNorm	5,00	44	15	3-3.5		1	1
1050304080125	3221910881825	M	8	1.25	TivolyNorm	6,80	49	16	3-3.5		1	1
1050304100150	3221910881832	M	10	1.5	TivolyNorm	8,50	52	18	3-3.5		1	1