

1093106 | SPEEDER2 concrete drill bit with 2 cutters - L110 mm - Centring tip - Quadruple flute - SDS+ TECHNIC (Tube)

High-performance drill bit for the incredibly fast and precise drilling of vibrated concrete and rocks, thanks to its quadruple fluting and its cutting insert with centring point.




x5 x10 x25

- Especially for high-strength concretes and stone
- Incredibly fast drilling
- Precise drilling
- Superior long life
- SDS+ shank
- High-strength steel
- Multi-facetted
- Centring point

Machine



Application

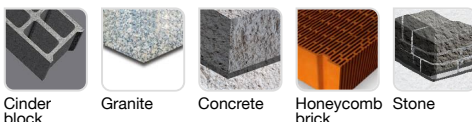

Cinder block

Granite

Concrete

Honeycomb brick

Stone

Features



Properties and benefits

- + SDS+ shank: attachment for SDS+ hammer drills (10 mm shank diameter) compliant with the SDS+ label, up to a power of 3 joules. ➡ Maximum striking power transmission for the simple and fast processing of the most difficult materials. For bits measuring 4 to 25 mm.
- + High strength steel body: body designed in a grade of steel designed for thermal processing, enabling excellent power and torque transmission. ➡ Enables optimal power and torque transmission to the head of the tool.
- + Multi-facetted cutting insert: carbide cutting insert designed with multiple facets, promoting the effective splitting of the materials ➡ Enables the excellent splitting of materials into dust, thus facilitating their extraction.
- + Centring point: carbide cutting insert designed with an integrated centring point at its centre. ➡ Enables the easy centring of the drill, particularly in coarse materials. Excellent drilling precision.

Sets



5 SPEEDER2 SDS+ drill bits with 2 cutting edges L 110-160 mm Ø 5 to 10 mm

7 SPEEDER2 SDS+ drill bits with 2 cutting edges L 110-160 mm Ø 6 to 14 mm

7 SPEEDER2 SDS+ centring tip drill bits with 2 cutting edges - L 110-160 mm Ø 4 to 12 mm



1093106 | SPEEDER2 concrete drill bit with 2 cutters - L110 mm - Centring tip - Quadruple flute - SDS+ TECHNIC (Tube)

High-performance drill bit for the incredibly fast and precise drilling of vibrated concrete and rocks, thanks to its quadruple fluting and its cutting insert with centring point.



Code	EAN	Ø	d2/CM	L	l	lu	QTY	PCB
10931060510	3221912069573	5	SDS +	110	50		10	1
10931060525	3221912069597	5	SDS +	110	50		25	1
10931060605	3221912069559	6	SDS +	110	50		5	1
10931060610	3221912069580	6	SDS +	110	50		10	1
10931060625	3221912069603	6	SDS +	110	50		25	1