


XT10322 | SEMI-RIGID disc **ESSENTIAL** (Hanging cardboard)

Tearproof semi-flexible reinforced fibre mount. Intensive work: polishing, punching, surface grinding, stripping (concrete, stone)

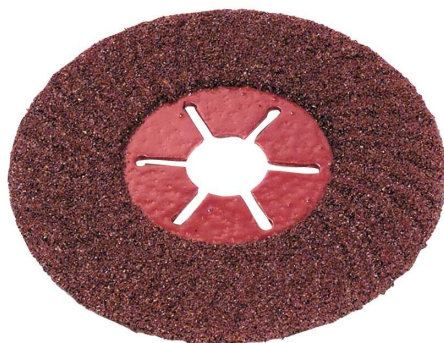

- 22.23 mm bore
- Silicium carbide grain

Machine



Application



Cement



Cement



Concrete



Stone

Features



Properties and benefits

- + 22.23 mm bore: standard bore for all types of grinding machine. ➡ Universal attachment suitable for all grinders: Ø115, 125, 230.
- + Silicium carbide grain: comprised of silica and carbon ➡ For the intensive machine or manual sanding of metals or wood (painted, varnished, coated)

Code	EAN	Dim/Ø	grain	Sanding level	QTY	PCB
XT10112011302	3128820113025	Ø125	36		1	3
XT10112011303	3128820113032	Ø125	80		1	3