

High-performance drill bit for the deep and large diameter drilling of reinforced concrete and harder materials. Fast and long-lasting drilling thanks to its multi-edge cutting inserts




- Especially for reinforced concrete and hard materials
- Deep and through-drilling
- Maximum long life
- Rapid drilling
- Precise drilling
  
- SDSmax shank
- High-strength steel
- Dust extraction +++
- Pad with 2 cutting edges



**Machine**



**Application**

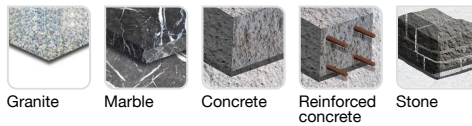

**Features**



**Properties and benefits**

- + SDSmax shank: attachment for SDSmax hammer drills (18 mm shank diameter) compliant with the SDSmax label, greater than 3 joules. ↻ Maximum striking power transmission for the simple and fast processing of the most difficult materials. For bits larger than 12 mm.
- + High strength steel body: body designed in a grade of steel designed for thermal processing, enabling excellent power and torque transmission. ↻ Enables optimal power and torque transmission to the head of the tool.
- + Effective dust clearance: body of the tool designed with a large-capacity fluted profile, for the wasy extraction of materials. ↻ For optimal and regular evacuation of dust.
- + Cutting insert with 4 cutting edges: carbide cutting insert designed with four cutting edges, distributed force, anti-jamming effect. ↻ Enables the drilling of hard materials and reinforcing rods, thanks to its 4 cutting edges.



Code	EAN	Ø	d2/CM	L	l	lu	QTY	PCB
10906031600	3221910863210	16	SDS MAX	920	800		1	1
10906031800	3221910863227	18	SDS MAX	920	800		1	1
10906032000	3221910227869	20	SDS MAX	920	800		1	1
10906032200	3221910227876	22	SDS MAX	920	800		1	1
10906032500	3221910227883	25	SDS MAX	920	800		1	1
10906033200	3221910227890	32	SDS MAX	920	800		1	1
10906034000	3221910863234	40	SDS MAX	920	800		1	1